

# PB1380



**This Spider Lift is light weight and has amazingly compact stowed dimensions allowing it to be used in the most difficult locations.**

**The basket is simple and easy to remove in less than one minute, allowing very narrow access and reducing the stowed length to only 3.71 m.**

The 1380 Spider Lift is a simple, strong machine, ideally suited to commercial contractors such as painters, electricians and shed builders.

The large fly-jib is designed for maximum travel and flexibility. The controls can be operated from the basket or the ground. Driving is via a remote control.

Expandable tracks provide stability on uneven terrain, and narrow access ability when retracted.



**Above left:** This super-compact Spider Lift is ideal for accessing tight locations.

**Above middle:** When the tracks are retracted, the 1380 will fit through the smallest of openings.

**Above right:** The flexibility of the long-travel stabilisers allow set-up almost anywhere.


**Opposite Page:** This trailer package weighs in at approx. 2 t so can be towed without the need for electric brake controllers.








# PB1380

<b>Max working height</b>	<b>12.99 m</b>
Max working height in narrow set	N/A
<b>Max horizontal outreach</b>	<b>7.70 m</b>
Max SWL	200 kg
<b>Weight: Honda + 240V</b>	<b>1760 kg</b>
: Honda + Batteries	1800 kg
Turret rotation	360°
Basket rotation	Optional
Ground pressure driving (approx)	37.8 kN/m2
Max stabiliser force	11.81 kN
Max stabiliser pressure (std foot pad)	375 kN/m2
Traffic load (live load) travelling	3.1 kN/m2
Traffic load (live load) stabilised wide	2.3 kN/m2
Traffic load (live load) stabilised narrow	N/A
Auto levelling	N/A
Max slope for stabilisers (no extra pads)	12 °
Gradeability lengthwise	15 °
Gradeability sideways	12 °
Standard power source	Honda 13 Hp Petrol
Optional power source	Hatz 7 Hp Diesel
Dual power options	240V Electric or Batteries
Expanding tracks	Std
Drive Speed	2.4 km/h
Radio control	Wired remote
Electric emergency lowering	Optional

(All specs E&OE and subject to change)

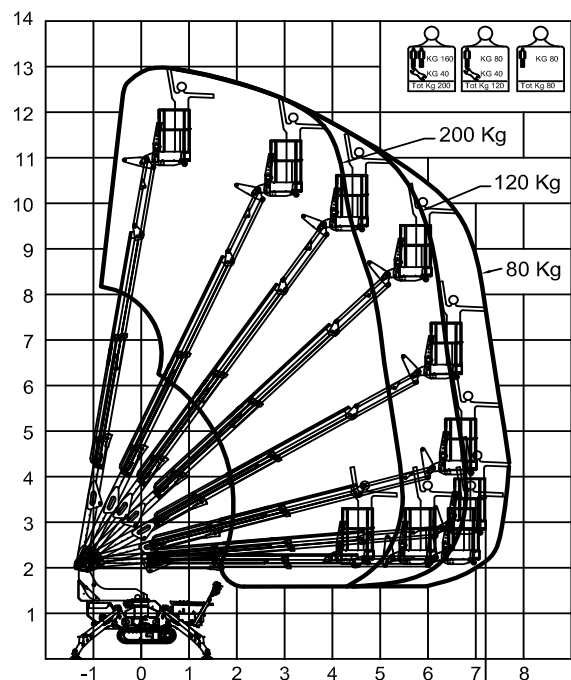

\*Diagram shown with NO basket rotation

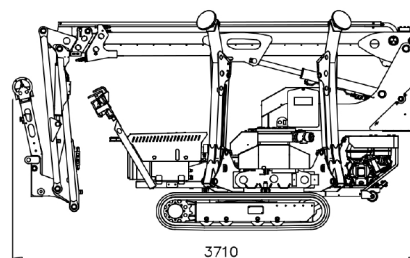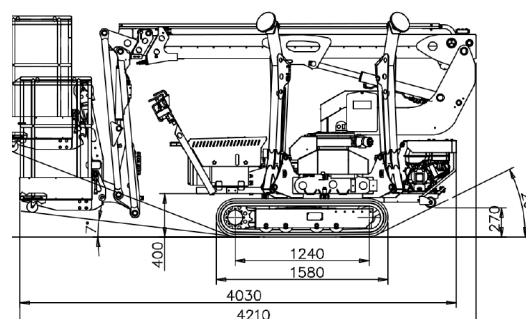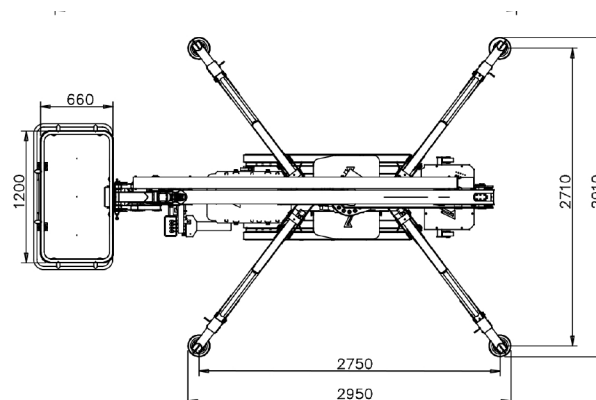

SEE THE 1380  
IN ACTION

